

Motion planning and control techniques for driver assistance systems and autonomous vehicles

Antoine Tordeux

Forschungszentrum Jülich and Wuppertal University
a.tordeux@fz-juelich.de

Overview

Introduction

Motion planning techniques

- Functional architecture of automated vehicles
- Sensing and perception
- Motion planning
- Actuation control

Control and safety

- Stability and homogenisation
- Functional safety

Conclusion

Overview

Introduction

Motion planning techniques

- Functional architecture of automated vehicles

- Sensing and perception

- Motion planning

- Actuation control

Control and safety

- Stability and homogenisation

- Functional safety

Conclusion

Introduction

Road vehicles are becoming increasingly automated (VDA, 2015).

Advanced electric and electronic (E/E) driver assistance systems (ADAS)

Connected and automated vehicles (autonomous car)

Introduction

Road vehicles are becoming increasingly automated (VDA, 2015).

Advanced electric and electronic (E/E) driver assistance systems (ADAS)

Connected and automated vehicles (autonomous car)

Motivations

- ▶ **Safety** More than 90% of road accidents attributed to driver error (with 31% involving legally intoxicated drivers, and 10% from distracted drivers)
- ▶ **Performance** Reduction of driver reaction time (short distance spacing, platooning) and optimal route choice (efficient use of the network)
- ▶ **Mobility** For children, old or disable persons with no driving licence; development of share use models and cost reduction of the road transportation
- ▶ **Environment** Efficient (smooth) driving and routing (less jam) reducing fuel consumption and pollutant emission

Automation classification

Automation level classification for road vehicles (SAE, 2014)

Automation level ↓	L0 Automated systems have no vehicle control, but may issue warnings No automation	
	L1 Assistance systems (ACC, lane keeping, ...) Assisted	Under driver supervision
	L2 Partial longitudinal and lateral controls for specific situations Partial automation	
	L3 Longitudinal and lateral controls for specific situations Conditional automation	
	L4 Full automation for all situations in a defined use case High automation	Without supervision
	L5 Full automation for all situations of a given journey Full automation	

Projections of development

- ▶ **Manufacturers**: L3 level by 2020 (Tesla, Google, Nissan, Volvo, BMW, ...)
- ▶ **Information services companies**
 - Level 3 by 2020, level 4 by 2025 and level 5 by 2030 (IHS Markit)
 - L3, L4 and L5 Penetration rates of 100, 75 and 25% by 2030 (KPMG)
 - 75% of light-duty vehicle sales automated by 2035 (Navigant)
- ▶ **Insurance institutes**
 - All cars may be automated by 2030 (III)
 - Reduction from 30 to 80 % of the accidents (PWC Insurance Monitor)
- ▶ **Research** Survey during the Transportation Research Board Workshops on Road Vehicle Automation (around 500 experts, 2014) :


When will automated vehicles take children to school ?

→ More than half expect 2030 at the very earliest; 20% said not until 2040; 10% never expect it.

History

Company

Research

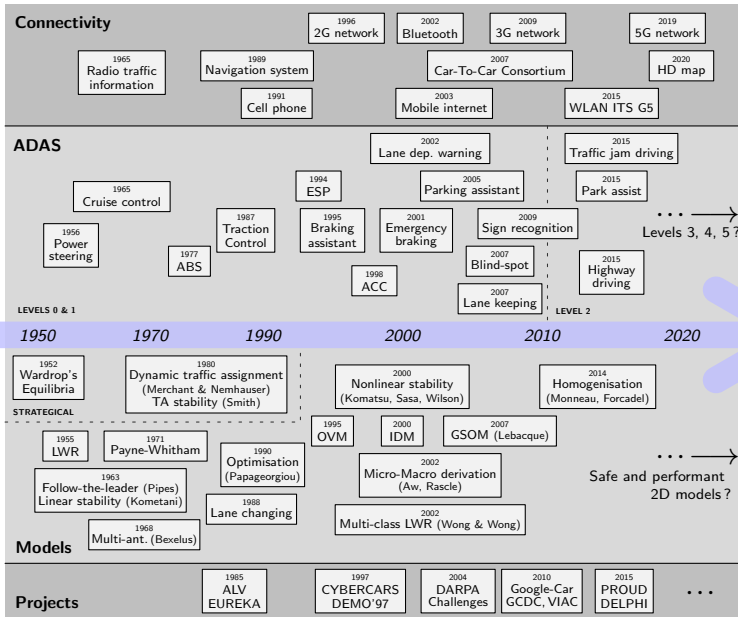

Overview

Introduction

Motion planning techniques

- Functional architecture of automated vehicles

- Sensing and perception

- Motion planning

- Actuation control

Control and safety

- Stability and homogenisation

- Functional safety

Conclusion


Functional architecture of the motion planning

Automated vehicles are **mission-based** and have a **functional architecture** (Behere und Torngren, 2015; Paden et al., 2016).

Classical components of the autonomous driving :

1. **Perception** Collection, fusion and interpretation of the sensor (radar, camera) and connectivity (V2V, V2I) data
→ *Building of a virtual world*
2. **Motion planning** Routing choice and determination of continuous and collision-free reference trajectories
→ *Calculation of short and safe feasible paths*
3. **Actuation** Determination of stable commands to the vehicle to follow the reference trajectory
→ *Steering, braking and acceleration rate controls*

Functional architecture of automated vehicles

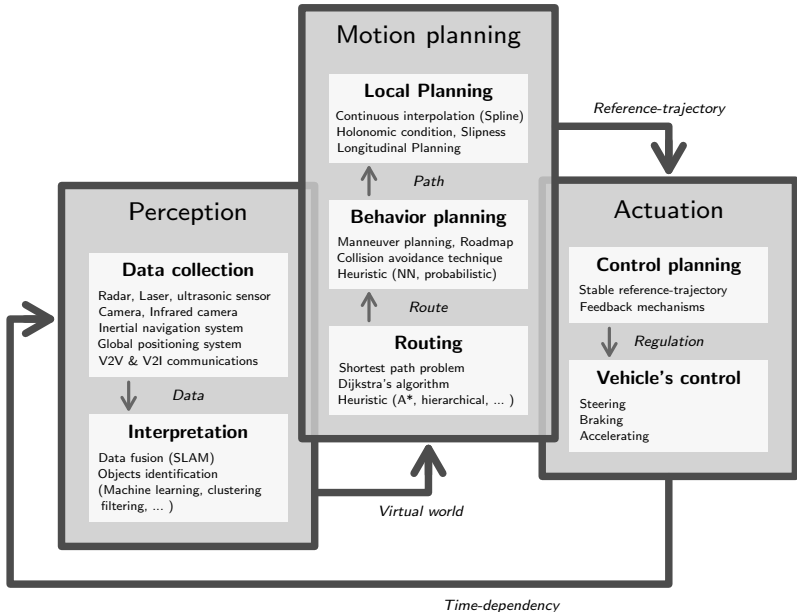


Functional architecture of automated vehicles


Automatisation

Level L1

ACC, lane keeping

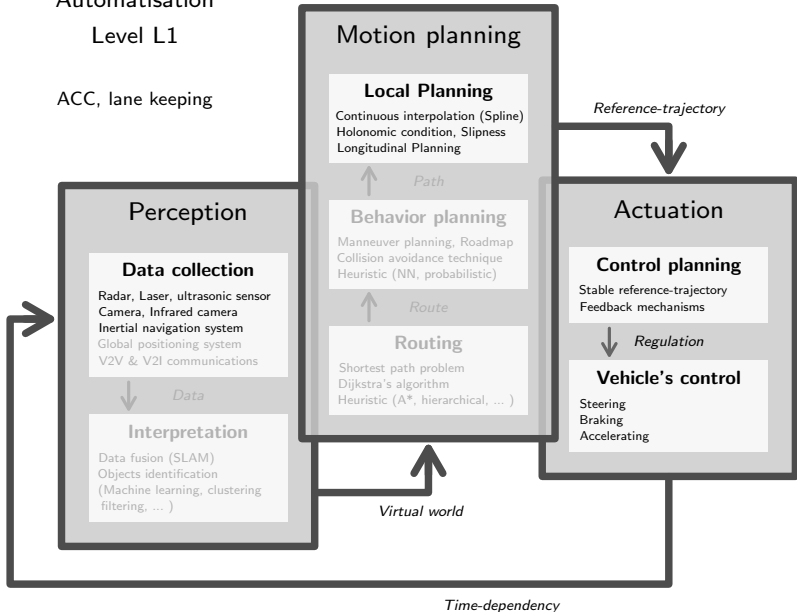

Functional architecture of automated vehicles

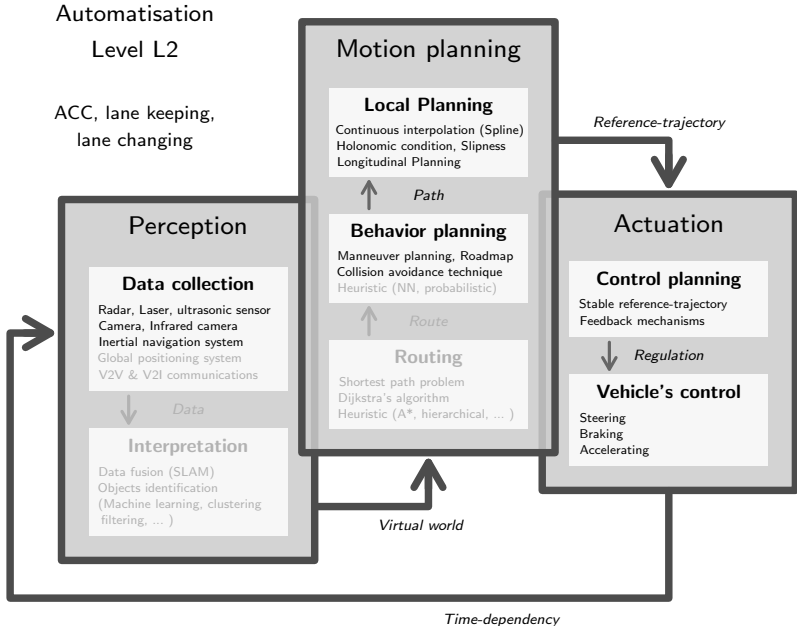


Functional architecture of automated vehicles


Automatisation

Level L3-L4-L5

→ Full automatisatisation

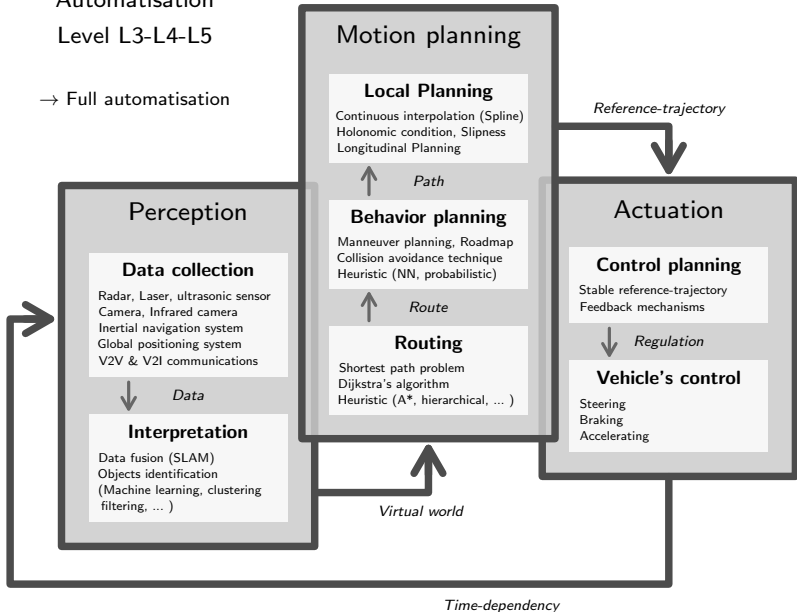

Functional architecture of automated vehicles

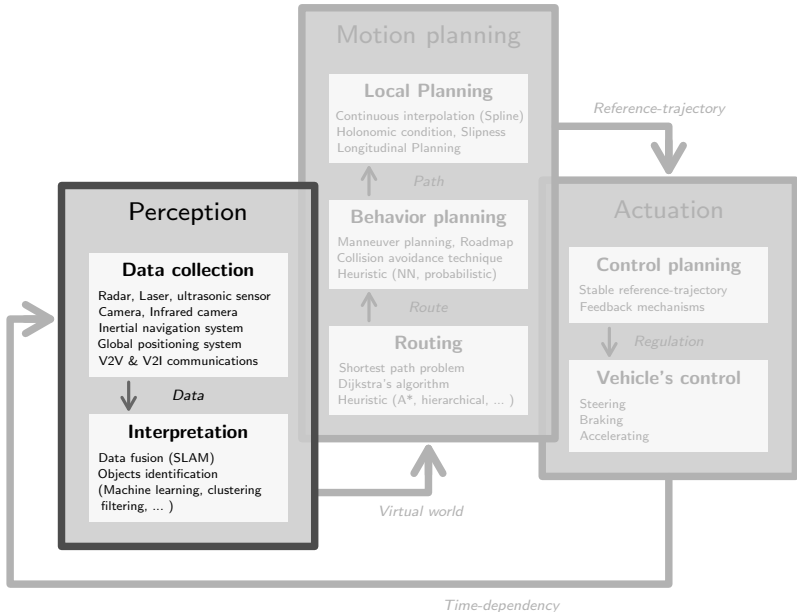

Sensor and communication technologies

Communication technology

- ▶ **Vehicle to vehicle** (V2V) communications (own frequency, *Car to Car Communication Consortium*)
- ▶ **Vehicle to infrastructure** (V2I) communications (information to the driver/vehicle, centralized regulation)


Sensor technology

- ▶ **Cameras** coupled to computer vision to monitor traffic signals, road markings or to detect obstacles or turns
- ▶ **Radar (LIDAR), sonar, laser and ultrasound** to evaluate distances and relative speed with potential obstacles around the vehicle
- ▶ **Global Position System** (GPS) to determinate vehicle location
- ▶ **Inertial navigation systems** such as accelerometers and gyroscopes to continuously calculate acceleration and rotation

Exogenous

Endogenous

Exteroceptive sensor technologies for automated vehicles

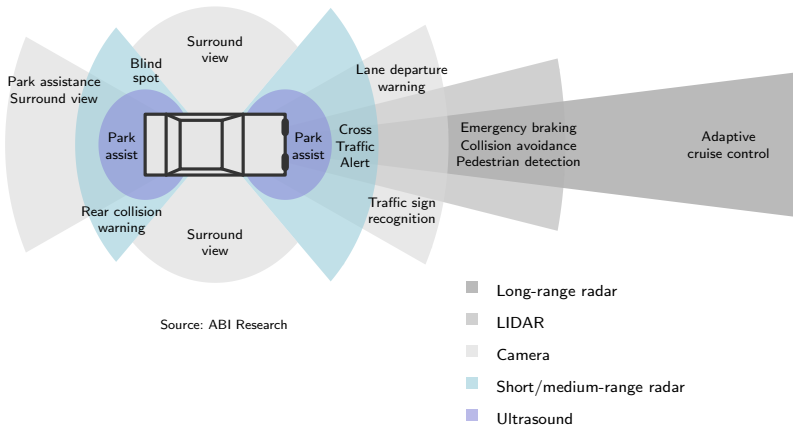

- └ Motion planning techniques
- └ Sensing and perception

Sensing and perception

Metric knowledge : measuring distances and scenes around the vehicle (sensing)

Small speed : short-range sensing / *Large speed* : long-range in high resolution
(Angular resolution $< 0.1^\circ$ at 130m if speed $> 100\text{km/h}$ (Blosseville, 2015))

Conceptual knowledge : identifying lanes, infrastructure, neighbor vehicles, pedestrians or obstacles and their evolution (computer vision – filtering, machine learning, ...)

Common robotic adage:

« *Sensing is easy, perception is difficult* »

Sensing → **Clustering** → **Identification** → **Tracking**

True negative (ghost objects) vs *false positive* (blindness)

Dynamic sensor/data fusion : SLAM (Simultaneous Localisation and Mapping) with geo-referenced maps (single lanes geometry and topology; Thrun et al. 2005)

Example: Map-aided Evidential Grids for Driving Scene Understanding

Kurdej et al. 2015

Occupancy grids: Description of the environment in discrete cells

Three evidential occupancy grids:


└ **Prior information** (map)

└ **Sensor acquisition**

└ **Perception** (fuzzy logic)


Modelling of the world using a **tessellated representation** of objects such as

- ▶ Free navigable space
- ▶ Free non-navigable space
- ▶ Mapped infrastructure (buildings)
- ▶ Unmapped infrastructure
- ▶ Stopped objects (obstacles)
- ▶ mobile moving objects

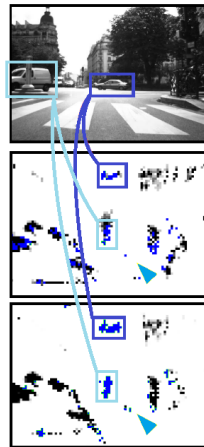


(Moras et al. 2011)

Functional architecture of automated vehicles

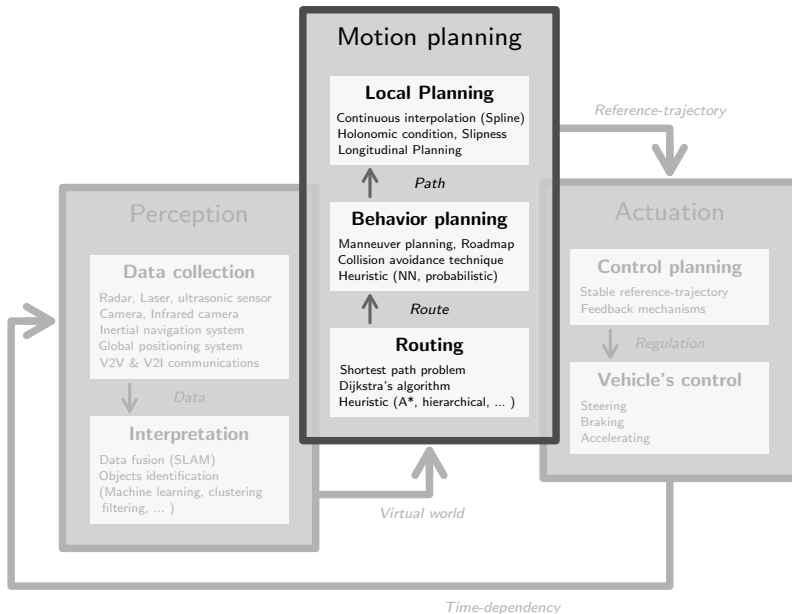

Analogy to classical modelling scales in transportation systems

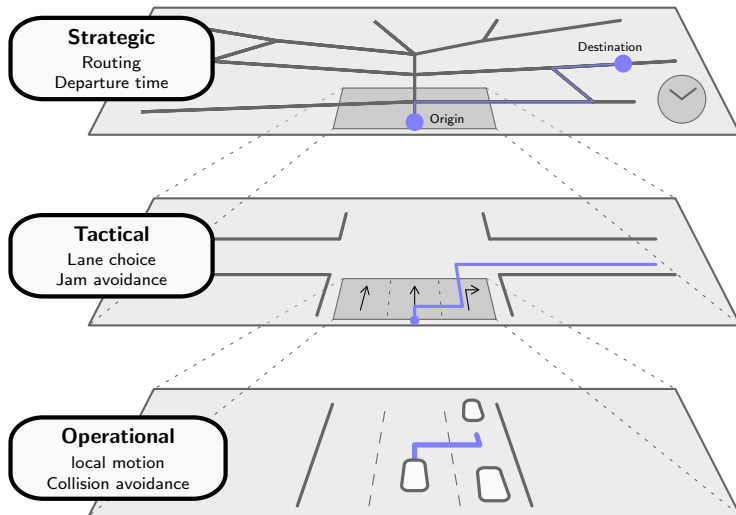

Routing

Shortest path problem in a positive real-valued directed graph

Static problem: polynomial complexity

Time-dependent formulation: NP-hard problem (use of heuristics) – Dynamic (numerical) algorithm or reactive algorithm looking for solution at any time

- ▶ **Dijkstra's algorithm** Complexity in $O(V^2)$: not practicable in real time
- ▶ **A-Star heuristic** Use of an heuristic cost function guiding the search
- ▶ **Decomposition** Network decomposition in subsets or principal components
- ▶ **Preprocessed method** Preprocessing of balanced partition of the graph
- ▶ **Hierarchical method** Weights according to the hierarchy of road networks
- ▶ **Sampling based** Monte-Carlo techniques for the finding of the shortest path
- ▶ **Combination** Hybrid algorithms combining different methods
- ▶ ... (see Gonzalez et al. 2016 or Bast et al. 2015 for surveys)

Behavior planning

Finding of an efficient and safe (collision-free) path in a dynamical environment with moving obstacles

Understanding of the current driving situation \rightsquigarrow Cognitive Vehicle

Time-dependent complex problems

- ▶ **Manoeuvre-based** Categorical driving situations: following, lane-keeping, overtaking...
- ▶ **Variation methods** Formulation of the problem as an optimisation problem
- ▶ **Roadmap** Borrowed from robotic: visibility graph, Voronoi diagram...
- ▶ **Potential fields** Gradient problems with attractive (dest.) and repulsive (obstacle) fields
- ▶ **Velocity obstacle** Determination of collision-free cones over finite time horizons
- ▶ **Heuristic** Neuronal networks, Simulated annealing, ant/swarm optimisation...
- ▶ ... (see Masehian 2016, Tang et al. 2012, Kamil 2015 or Paden et al. 2016 for surveys)

Local planning

Determination of the **reference trajectory**: **smooth trajectory dynamically-feasible** for the vehicle


Interpolating curve planners (curvature optimisation)

- ▶ Regular interpolation of the reference path
- ▶ Clothoid, polynomial, Bézier, spline, ...



Speed/acceleration planners $\ddot{x}_i = F(s_i, \dot{x}_i, \dot{x}_{i+1}, \dots)$

- ▶ Comfortable and safe following model
- ▶ Adaptive cruise control (ACC)




Non-holonomic driving constraints $m\ddot{p}_c = F_f + F_r$

- ▶ Kinematic single track constraints
- ▶ Inertial and slipness constraints



Functional architecture of automated vehicles

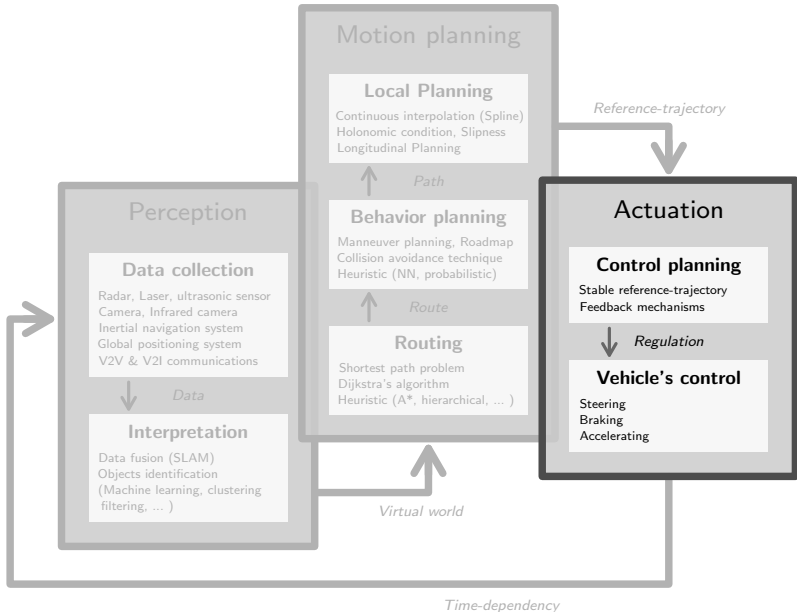

Actuation control

Actuation control in two steps :

1. Calculation of a command to follow the reference trajectory $(x_{ref}, v_{ref})(t)$

→ Feedback mechanisms fb (e.g. relaxation processes)

$$\ddot{x}(t + T_a) = \text{fb}((x, x_{ref}, \dot{x}, v_{ref})(t))$$

with T_a the mechanical application time

2. Effective mechanical control of the vehicle

→ Steering, braking and accelerating controls

Overview

Introduction

Motion planning techniques

- Functional architecture of automated vehicles

- Sensing and perception

- Motion planning

- Actuation control

Control and safety

- Stability and homogenisation

- Functional safety

Conclusion

Stability

Motion planning have to describe **comfortable and safe dynamics**

→ **Stable and collision-free dynamics**

► **Stability of the route choice** (Smith, 1984)

- Route choice robust to perturbation / Non-oscillating route choice
- Motion planning / Routing step

► **Stability of the reference trajectory**

- Attractive reference trajectory / Exponential stability $\|x(t) - x_{ref}(t)\| \leq Ke^{-\kappa t}$
- Actuation / Control planning

► **Local and global stability of the homogeneous solution**

- Congested state – Stability of the homogeneous solutions where all vehicle speed $\dot{x}_i(t) = v$ and spacing $x_{i+1}(t) - x_i(t) = d$ are equal
- Motion planning / Local planning

Stability of the homogeneous solution


Control of the ACC-systems: description of **stable and collision-free dynamics**¹

→ **Linear stability theory for dynamical systems**

► Local stability

- Following behavior behind a vehicle moving at constant speed
- Stable and collision-free (over-damped convergence)

One vehicle



► String-stability

- Stable homogeneous solutions $(s, v) \in \mathbb{R}_+^2$

$$\left| \begin{array}{ll} x_{i+1}(t) - x_i(t) & \rightarrow s \\ \dot{x}_i(t) & \rightarrow v \end{array} \right. \quad \text{as } t \rightarrow \infty \quad \text{for all } i$$

- Consideration of local, convective and advective perturbations
- Control of the system stationary state

A line of vehicles (ring/infinite lane)



¹see for instance Darbha et al. 2009; Kikuchi et al. 2003; Zhou et al. 2005; Paden et al. 2016

Homogenisation

Homogenisation: *Monotone* convergence of the system to the homogeneous solution (Monneau & Forcadel, 2014)

- Control of the **transient and stationary states** of the system
- **Bounds of minimal speed and spacing**

Principle : constraints on the model's parameters

- Invariance principle for spacing variables
- Comparison principle on the invariant sets
- Convergence of the system to homogeneous solution by up- and down-bounds


Example: Optimal velocity model (OVM)

$$\ddot{x}_i(t) = \frac{1}{\tau} (V(s_i(t)) - \dot{x}_i(t))$$


Global stability : $\tau V'(s) < 1/2$

Homogenisation : $\tau V'(s) < 1/4$


Stability + Homogenisation

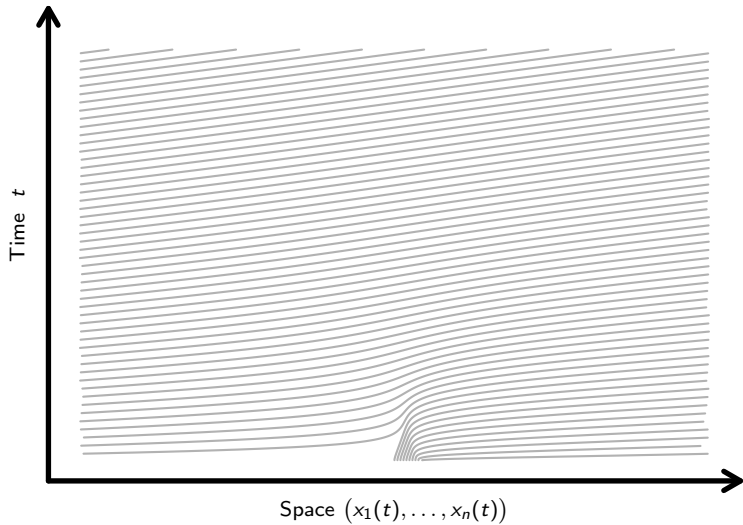


Stability + Homogenisation

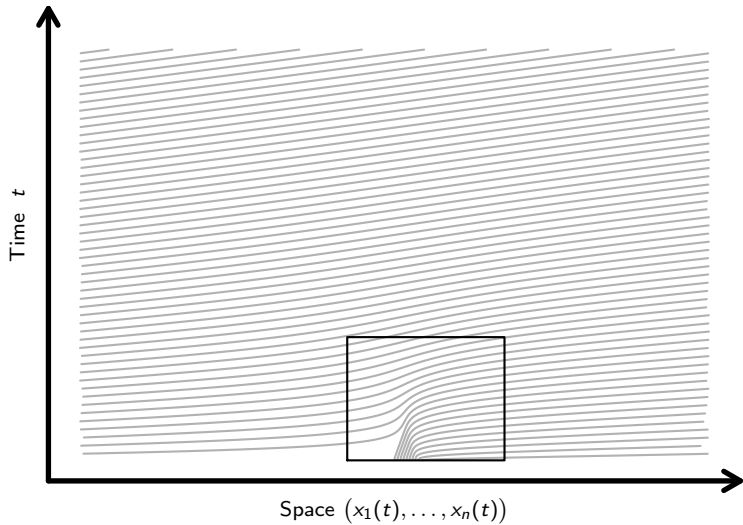

Stability + Homogenisation

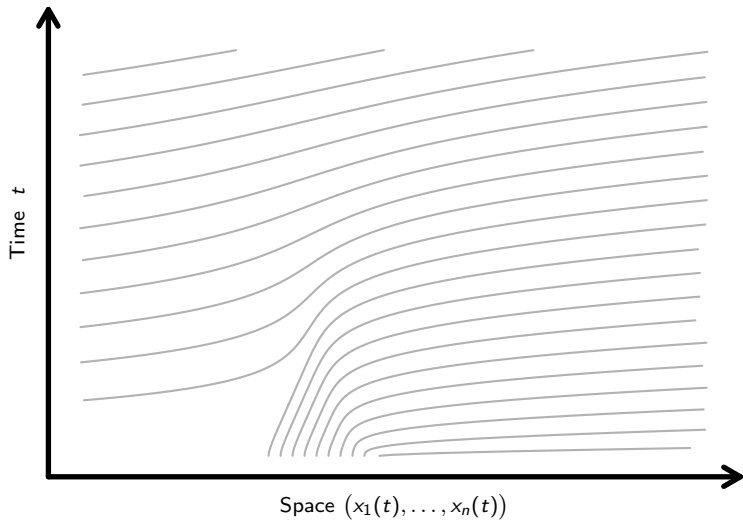

Stability + Homogenisation

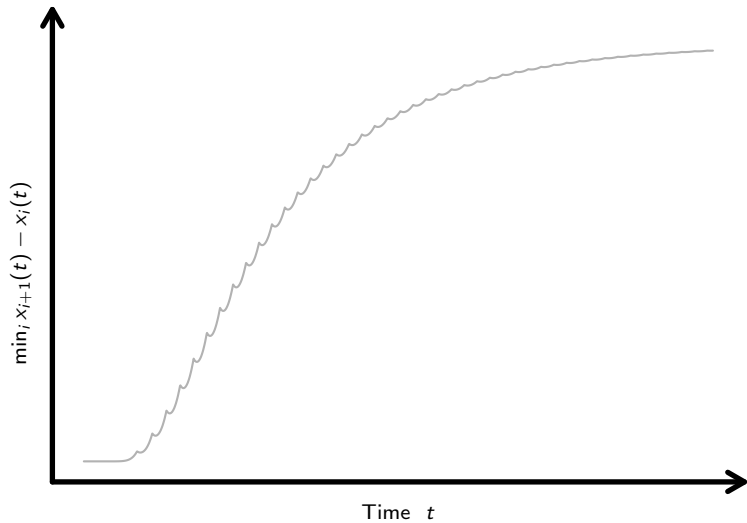

- └ Control and safety
- └ Functional safety

Safety for automated vehicles

The **safety** is a central aspect of connected and automated vehicles

Essential argument

- **for** the development of automated vehicle (more than 90 % of the accident due to human errors; Singh, 2014),
- and **against** : safety of autonomous vehicles still need to be proven

Biggest risk sources for autonomous vehicles : **collisions** (Lefèvre et al., 2014)

Potential high severity of the damage in case of collision (injure, fatality)

→ Depends on the speed and type of collision

Very low exposure

- └ Control and safety
- └ Functional safety

Limit of the empirical evaluation

Even if many accidents in road traffic occur, the **probability for a accident with injures or fatalities per unit of distance is very low.**

- Example USA:
- Injure-rate is around 40 per 100M kilometres
 - Fatality-rate is around 0.7 per 100M kilometres

Example (Kalra and Paddock, 2015): we have to observe without accident 100 autonomous vehicles driving 24h a day and 365 days a year during

4 months	(injure)	or	19 years	(Fatality)
12M km			658M km	

to statistically prove that injure- and fatality-rate of the autonomous vehicles is smaller than the rate of conventional vehicles.

Connected and automated vehicles are **technologies in development**

- **Empirical evaluation of the safety not suitable**

- └ Control and safety
- └ Functional safety


Functional safety from the ISO 26262 standard

Standardisation (Schlummer, 2014): IEC 61508 (generic norm), ISO 26262 (automotive area) or companies and associations' directives, ...

ISO 26262-3 und 26262-4: Functional safety for the concept and development phases of E/E systems in road cars

→ **Completeness and consistence problem**

For all items and all driving situations :



- ▶ **Exhaustive listing** of all driving situations and associated potential hazards (AMDEC, dependability, situation classification)
- ▶ Risk assessment : **ASIL risk classification scheme** as function of *Severity*, *Exposure*, *Controllability*

- └ Control and safety
- └ Functional safety

Classification of the driving situations

Discrete (categorical) descriptions of the driving situations according to (Warg et al., 2014; Jang et al., 2015; VDA, 2015b) :

- | | |
|-----------------------|---|
| ▶ Vehicle | speed, direction, state, mode, manoeuvre, ... |
| ▶ Road | road type, surface type, curving, slope, ... |
| ▶ Neighborhood | infrastructure, vehicles, pedestrians, obstacles, ... |
| ▶ Environment | weather, luminosity, temperature, ... |

Driving situations, environment and potential hazards are **numerous and varied** : they can only exhaustively be described in **specific simple conditions**.

→ Example – Driving in **highways** : *following, lane keeping, lane changing*

Driving situations in **urban** or **peri-urban** are **more complex**.

- └ Control and safety
 - └ Functional safety

Safety concepts

Functional safety concept: *Collision avoidance systems*

→ *Controllability* part of the ASIL risk classification

Technical safety concepts

► **Emergency protocols**

System failure: failure detection, emergency breaking
Unexpected event: emergency avoidance procedure
(*reactive control*, Binfet-Kull et al. 1998).

► **Driving situation analysis**

Setting of safe conditions for all manoeuvres
(mathematical criteria based on distances, speeds...)

► **Redundancy**

Sensing : Sensor/camera/GPS/carte fusion (SLAM)
Motion planning : use of several planners
Actuation : for instance steering through stereo-breaking

- └ Control and safety
- └ Functional safety

Functional safety for autonomous vehicles: limit

Main difference with autonomous vehicles (Warg et al., 2014):

- ▶ *Conventional vehicle*: **the driver is responsible** for the vehicle control.
- ▶ *Autonomous vehicle*: **the automated driving system is responsible**.

→ **Exhaustive listing of all driving situations and hazards** with autonomous vehicle at the levels L3, L4 or L5 is **not possible**.²

« *The higher complexity and the partly implicit definition of the tasks [of autonomous vehicles] for the E/E systems will make it harder to argue completeness and correctness of the safety requirements in each phase of the ISO 26262 life-cycle.* »
(Bergenheim et al., 2015).

« *Vehicle-level testing won't be enough to ensure safety. It has long been known that it is infeasible to test systems thoroughly enough to ensure ultra-dependable system operation. [...] Thus, alternate methods of validation are required, potentially including approaches such as simulation or formal proofs* »
(Koopman und Wagner, 2016).

²Warg et al., 2014; Bergenheim et al., 2015; Johansson, 2016; Koopman und Wagner, 2016.

- └ Control and safety
- └ Functional safety

Dynamic safety analysis

Development of **specific tools for the safety** aiming to take into account the **varied dynamical aspect** of the driving

- ▶ Working group *safety of the intended function (SoTIF)* in the revision of the ISO 26262 standard

Examples :

- **Dynamic evaluation of the safety** with temporal indicators as **Time-to-Collision**, **Time-to-React** or **Time-Gap** (Tamke et al., 2011; Berthelot et al., 2012)
- Dynamic detection of **unusual events** or **conflictual manoeuvres** (Lefèvre, 2014)
- **Mathematical analyse** of the collision possibilities; Development of **robust collision-free models and avoidance techniques** (Zhou und Peng, 2005)
- **Real-time trajectories predictions** by **simulations** (Eidehall und Petersson, 2008; Ammoud et al., 2009; Chen und Chen, 2010; P. Olivares et al., 2016)

Overview

Introduction

Motion planning techniques

- Functional architecture of automated vehicles

- Sensing and perception

- Motion planning

- Actuation control

Control and safety

- Stability and homogenisation

- Functional safety

Conclusion

Conclusion

Advanced driver assistance systems are growing up equipments proposed by manufacturers or automotive suppliers

- Improvement of the **safety** and the **driving comfort**
- Levels L1 and L2 of automation

Progressive transition to connected and autonomous vehicles (Blosseville, 2015)

- ▶ **Autonomous Vehicles** Level L3 of automation (autonomous highway driving)
 - High intelligence of the embedded systems (perception, map)
- ▶ **Connected vehicles** Autonomy + Connectivity — Level L4
 - Formalisation of the driving in different contexts (highway, peri-urban, urban)
 - Deployment of V2X communications
- ▶ **Integrated vehicles** Connected + Cooperation with the infrastructure — Level L5
 - High performances on networks (optimal affectation)
 - Safety solution at high speed and in complex 2D contexts (mixed urban traffic)

Challenges

Full driving automation depends on the **advances of intelligent transportation systems, sensor and connectivity technologies, and computational capacity** (Blosseville, 2015)

- ▶ Motion in **complex 2D urban environments with mixed traffic**
 - Driving situation **very varied** / Driving behavior **few structured** (Saad, 1987)
 - Complicated algorithms for the perception and the motion (machine learning, neural networks, ...) for which the **reliability is hard to estimate**.
 - *Long time* anticipation
- ▶ Autonomous vehicles to **avoid crashes due to human errors**. Yet most of the time, human driving is free of accident.
 - Challenge for automated cars: **replicate the crash-free performance** of human drivers. New type of crashes may emerge (ITF, OECD).
- ▶ Full autonomous vehicles (level L5) on **personal rapid transit systems**
 - Own infrastructure and driving rules
 - Increase of the mobility

References

1. VDA. Automation – From Driver Assistance Systems to Automated Driving. *Technical report*, Verband der Automobilindustrie, 2015
2. BASt. Rechtsfolgen zunehmender Fahrzeugautomatisierung. *Forschung kompakt* 11/12, Bundesanstalt für Straßenwesen, 2012.
3. Taxonomy and Definitions for Terms Related to On-Road Motor Vehicle Automated Driving Systems. *Standard*, SAE International, 2014.
4. L. Gomes. Urban jungle a tough challenge for google's autonomous cars. Technical report, *MIT Technology Review* 24, 2014.
5. S. Behere und M. Torngren. A functional architecture for autonomous driving. In *Workshop on Automotive Software Architecture Proceedings*, pages 3–10, 2015.
6. B. Paden, M. Cáp, S. Zheng Yong, D. Yershov, und E. Frazzoli. A survey of motion planning and control techniques for self-driving urban vehicles. *IEEE Transactions on Intelligent Vehicles*, 1(1):33-55, 2016.
7. J.M. Blosseville. Une brève histoire de l'intelligence des véhicules. Fondation Tuck, 2015.
8. S. Thrun, W. Burgard and D. Fox. Probabilistic Robotics (Intelligent Robotics and Autonomous Agents) Cambridge, Massachusetts, USA: *MIT Press*, 2005.
9. M. Kurdej, J. Moras, V. Cherfaoui and P. Bonnifait. Map-Aided Evidential Grids for Driving Scene Understanding. *IEEE Intelligent Transportation Systems Magazine* 7(1):30-41, 2015

References

10. I. Mura and A. Bondavalli. Hierarchical modeling and evaluation of phased-mission systems. *IEEE Transactions on Reliability* 48(4):360-368, 1999.
11. D. Gonzalez, J. Perez, R. Lattarulo, V. Milanese, and F. Nashashibi. Continuous curvature planning with obstacle avoidance capabilities in urban scenarios. In *Proc. IEEE ITSC*, pages 1430–1435, 2014.
12. B. Bast et al. Route planning in transportation networks. *CoRR*, abs/1504.05140, 2015.
13. E. Masehian and D. Sedighizadeh. Classic and heuristic approaches in robot motion planning: A chronological review. *Academy of Science, Engineering and Technology* 29:101, 2007.
14. S. Tang, W. Khaksar, N. Ismail, and M. Ariffin. A review on robot motion planning approaches. *Pertanika Journal of Science & Technology* 20:15–29, 2012.
15. F. Kamil, S. Tang, W. Khaksar, N. Zulkifli and S. Ahmad. A review on motion planning and obstacle avoidance approaches in dynamic environments. *Adv Robot Autom* 4:134, 2015.
16. M.J. Smith. Existence, uniqueness, and stability of traffic equilibria. *Transportation Research, Part B* 13:295-304, 1979.
17. M.J. Smith. The stability of a dynamic model of traffic assignment – An application of a method of Lyapunov. *Transportation Science* 18:245-252, 1984.
18. S. Peeta and T.-H. Yang. Stability issues for dynamic traffic assignment. *Automatica* 39(1):21-34, 2003.

References

19. S. Darbha und K. Rajagopal. Intelligent cruise control systems and traffic flow stability. *Transportation Research Part C: Emerging Technologies* 7(6):329–352, 1999.
20. S. Kikuchi, N. Uno, und M. Tanaka. Impacts of shorter perception-reaction time of adapted cruise controlled vehicles on traffic flow and safety. *Journal of Transportation Engineering* 129(2):146–154, 2003.
21. J. Zhou und H. Peng. Range policy of adaptive cruise control vehicles for improved flow stability and string stability. *IEEE Transactions on Intelligent Transportation Systems* 6(2):229–237, 2005.
22. R. Monneau, M. Roussignol, and A. Tordeux. Invariance and homogenization of an adaptive time gap car-following model. *NoDEA* 21(4):491–517, 2014.
23. S. Singh. Critical reasons for crashes investigated in the national motor vehicle crash causation survey. *Technical report* No. DOT HS 812 115, National Highway Traffic Safety Administration, 2014.
24. S. Lefèvre, D. Vasquez, und C. Laugier. A survey on motion prediction and risk assessment for intelligent vehicles. *ROBOMECH Journal*, 1(1):1–14, 2014.
25. N. Kalra und S.M. Paddock. Driving to safety: How many miles of driving would it take to demonstrate autonomous vehicle reliability? *Technical report*, RAND Corporation, 2015.
26. ISO 26262:2011. Road vehicles – Functional safety. *Standard*, International Organization for Standardization, 2011.

References

27. M. Schlummer. Herausforderungen der Funktionalen Sicherheit im Automobil- bereich. *104. Sicherheitswissenschaftlichen Kolloquium*, Wuppertal, 2014.
28. F. Warg, M. Gassilewski, J. Tryggvesson, V. Izosimov, A. Werneman, und R. Johansson. Defining autonomous functions using iterative hazard analysis and requirements refinement. In *SAFECOMP Workshops Proceedings*, pages 286–297. Springer, 2014.
29. VDA 702. Situationskatalog E-parameter nach ISO 26262-3. *Technical report*, Verband der Automobilindustrie, 2015b.
30. H. Jang, H. Kwon, S.-H. Hong, und M. Lee. A Study on Situation Analysis for ASIL Determination. *Journal of Industrial and Intelligent Information*, 3(2):152–157, 2015.
31. M. Binfet-Kull, P. Heitmann, und C. Ameling. System safety for an autonomous driving vehicle. In *IEEE International Conference on Intelligent Vehicles*, pages 469–476, 1998.
32. P. Koopman und M. Wagner. Challenges in autonomous vehicle testing and validation. *SAE Int. J. Trans. Safety*, 4:15–24, 2016.
33. C. Bergenhem, R. Johansson, A. Söderberg, J. Nilsson, J. Tryggvesson, M. Törngren, und S. Ursing. How to reach complete safety requirement refinement for autonomous vehicles. In *Critical Automotive applications: Robustness & Safety Proceedings*, 2015.
34. R. Johansson. Efficient Identification of Safety Goals in the Automotive E/E Domain. In *8th European Congress on Embedded Real Time Software and Systems Proceedings*, 2016.

References

- 35. ISO/AWI PAS 21448. Road vehicles – Safety of the intended functionality. *Technical report* (under development), International Organization for Standardization, 2016.
- 36. A. Tamke, T. Dang, und G. Breuel. A flexible method for criticality assessment in driver assistance systems. In *IEEE Intel. Veh. Symp.*, pages 697–702, 2011.
- 37. A. Berthelot, A. Tamke, T. Dang, und G. Breuel. A novel approach for the probabilistic computation of time-to-collision. In *IEEE Intel. Veh. Symp.*, pages 1173–1178, 2012.
- 38. S. Ammoun und F. Nashashibi. Real time trajectory prediction for collision risk estimation between vehicles. In *IEEE Intelligent Computer Communication and Processing*, pages 417–422, 2009.
- 39. A. Eidehall und L. Petersson. Statistical threat assessment for general road scenes using Monte Carlo sampling. *IEEE Transactions on ITS*, 9(1):137–147, 2008.
- 40. F. Chen und S. Chen. Simulation-based assessment of vehicle safety behavior under hazardous driving conditions. *Journal of Transportation Engineering*, 136(4):304–315, 2010.
- 41. P. Olivares, N. Rebernik, A. Eichberger, und E. Stadlober. Virtual stochastic testing of advanced driver assistance systems. In *Advanced Microsystems for Automotive Applications*, pages 25–35. Springer, 2016.
- 42. F. Saad. Analyse et modèle de la tâche de conduite. In *L'analyse des comportements et le système de circulation routière* (INRETS), pages 3–13, 1987.

Empirical evaluation of the accident-rate

- ▶ p is the probability of accident for autonomous vehicles.
- ▶ p_0 is the probability of accident in real traffic.

D is the collision-free traveled distance; it has a geometric distribution with parameter p . Therefore $P(D \leq n) = 1 - (1 - p)^n$.

We test

$$H_0 = \{p \geq p_0\}.$$

For a given traveled time n , we reject H_0 if $R_n = \{D > n\}$.

The probability of a false-positive is then

$$P_{H_0}(R_n) = 1 - P_{H_0}(D \leq n) \leq 1 - P_{p=p_0}(D \leq n) = (1 - p_0)^n = \alpha.$$

We have $p < p_0$ with confidence-level $1 - \alpha$ if

$$n \geq \frac{\ln(\alpha)}{\ln(1 - p_0)}.$$

Example of driving situation classification (H. Jang et al., 2015)

Factor	Sub-factor	Element	State
Vehicle	Driving Speed		Very Slow, Slow, Normal and Fast
	External Attachment		Without/with external attachment
	Operational Mode		Driving, Parking, Fuelling, Repairing
	Maneuver	Engine	On, Off
		Velocity	Accelerating, Constant, Decelerating
		Direction	Lane Keeping, Lane Changing, Turning
		Movement	Stop, Forward, Backward
Road	Linearity		Straight, Curved
	Slope		Plain, Sloped
	Layout		Invisible (blocked) , Visible (unblocked)
	Coarseness		Paved, Unpaved, Troublesome
	Nearby Elements	Obstacle	Clean, Obstacle
		Traffic	Smooth flow, Congestion
		Pedestrians	No, A Few, Many
Environment	Surface		Clear, Water (by rain etc), Snow/Ice
	Visibility		Dark, Bright, Foggy
	Temperature		Low, Medium, High
	Momentum		Windy, Calm